



Made in USA



DL-B LED High/Low Bay Luminaire

Description

The Daylight B series is a high performance low profile LED High/Low Bay luminaire that combines cutting edge optics and thermal management, with function. This design allows for pendant, wall or surface mount installations, and easily replaces 70-1,500W HPS or Metal Halide systems.

Characteristics

- Optical:** 120+ lm/Watt, 2700K–6000K, CRI >75
- Electrical:** 120–277V or 347-480V @ 700 mA, 30 to 600w models available
- Mechanical:** Aluminum house, 12" W 13-30" L 2 1/4" high, powder coated
- Certifications/Ratings:** cETLus, ROHS, IP65 rated, DLC Listed
- Reliability:** "EncapsLED" heat sink for superior cooling and durability
- Warranty:** 5 years (optional 10 years)
- Options:** 10KV Surge Protection (SP) Dimming (D) Photocell (PH) Motion (M2) or Smart Control (MS)

Performance


Model (EC)	System Wattage	5,000k Lumens
DL-B-40w	41	4,466
DL-B-80w	81	8,886
DL-B-120w	119	13,198
DL-B-160w	159	17,652
DL-B-200w	203	22,180
DL-B-240w	241	26,521
DL-B-280w	280	30,912
DL-B-320w	321	35,153
DL-B-360w	360	40,281
DL-B-480w	479	52,972
DL-B-560w	562	61,884

Model (PR)	System Wattage	5,000k Lumens
DL-B-30w	31	3,646
DL-B-60w	61	7,291
DL-B-90w	90	11,031
DL-B-120w	119	14,463
DL-B-150w	151	18,124
DL-B-180w	180	21,523
DL-B-210w	212	25,349
DL-B-240w	242	28,978
DL-B-300w	301	36,085
DL-B-360w	362	43,419
DL-B-420w	421	50,513
DL-B-480w	481	57,566
DL-B-540w	543	64,734
DL-B-600w	601	72,679


DL-B LED High/Low Bay Luminaire

Distribution Diagrams (120W)


Type 3M

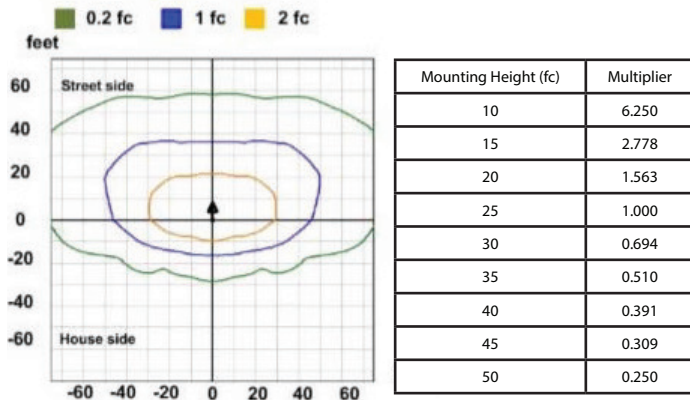


Type 5N 50 Degrees

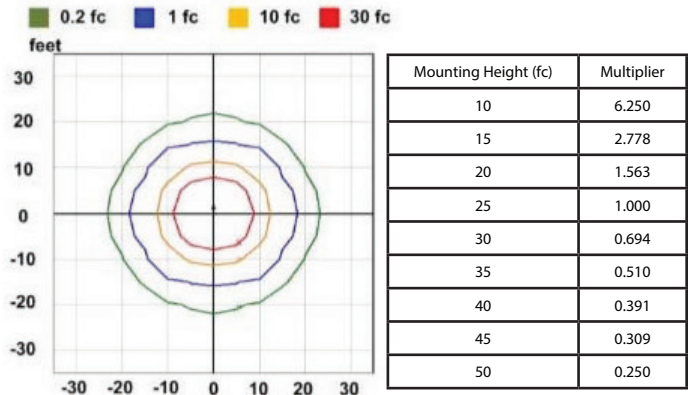

Type 5R 100 Degrees

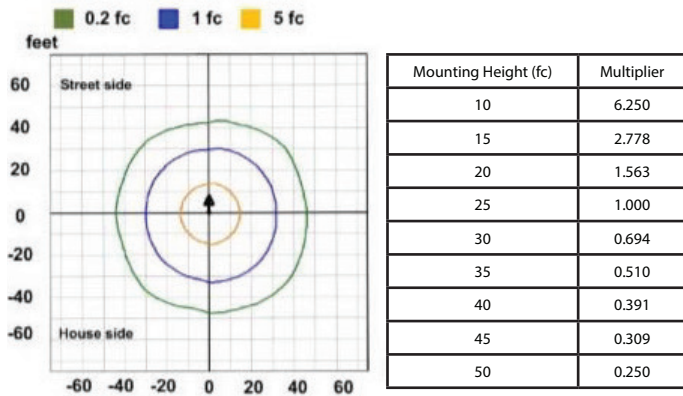

Type 5W 150 Degrees

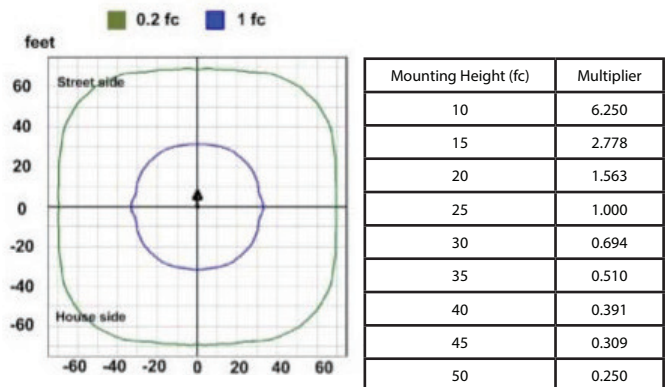

Order Information

Example: DL-WP-30W-3M-5000K-BRN-0-V1

Model	Distribution	Color Temp	Finish	Option	Voltage	Mounting
DL-B-xxxW (wa age 30 - 360W)	3M, 5W, 5R 5N	2700k - 6000K	BRN - bronze WHT - white BLK - black SLV - Silver	0 - None PH- Photon Cell M1 - Motion on/off M2 - Motion Dimming S - Smart	V1 - 120 - 277VAC V2 - 347 - 480VAC	See Order Code