



DL-SR LED SITE RETROFIT

DESCRIPTION

The Daylight **SR** series is a brilliant LED site RETROFIT that combines cutting edge optics and thermal management, with existing site aesthetics. These high performance retrofits distribute light like no others can, while providing unmatched energy savings of up to 90%. These lights are optimal for commercial, industrial, retail, schools, and municipal facilities where they wish to upgrade to LED but don't want to throw away a perfectly good fixture, or want an easy to install upgrade. These mount by simply removing the existing glass and sliding in this retrofit plate.

CHARACTERISTICS

- Optical:** 138 lm/Watt, 2700K–6000K, CRI >70
- Electrical:** 120 –277V, 347V, or 480V @ 700 mA, 30 to 360w models available
- Mechanical:** Aluminum Plate, by 2 1/4" high, powder coated with customized Size to fit
- Certifications/Ratings:** CETL/CUL, ROHS, IP65 rated, DLC Listed
- Reliability:** "EncapsLED" heat sink for superior cooling and durability (patent pending)
- Warranty:** 5 years (10 Year Optional)
- Options:** Dimming (D)

PERFORMANCE

Model #	System Wattage	5,000k Lumens	Model #	System Wattage	5,000k Lumens
DL-SR-30w	33	4,554	DL-SR-40w	44	5,280
DL-SR-60w	65	8,970	DL-SR-80w	88	10,560
DL-SR-90w	96	13,248	DL-SR-120w	128	15,360
DL-SR-120w	128	17,664	DL-SR-160w	172	20,640
DL-SR-150w	159	21,942	DL-SR-200w	218	26,160
DL-SR-180w	193	26,634	DL-SR-240w	260	31,200
DL-SR-210w	221	30,498	DL-SR-280w	302	36,240
DL-SR-240w	256	35,328	DL-SR-320w	350	42,000
DL-SR-300w	318	43,884	DL-SR-400w	436	52,320
DL-SR-360w	386	53,268	DL-SR-480w	524	62,880
DL-SR-420w	460	59,800	DL-SR-560w	612	73,400




USA Made




DL-S LED SITE RETROFIT

Distribution Diagrams (120W)


Type 3M

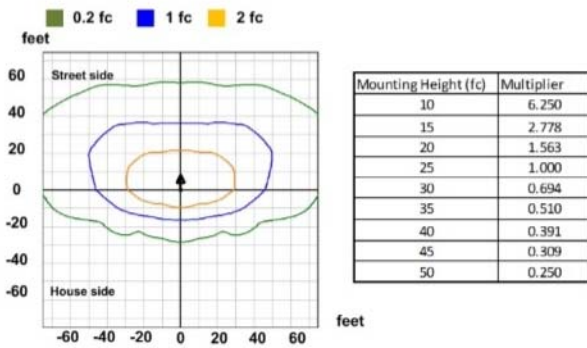


Type 5N 50 Degrees

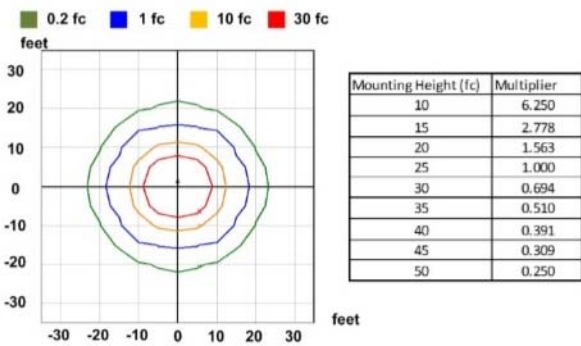

Type 5R 100 Degrees

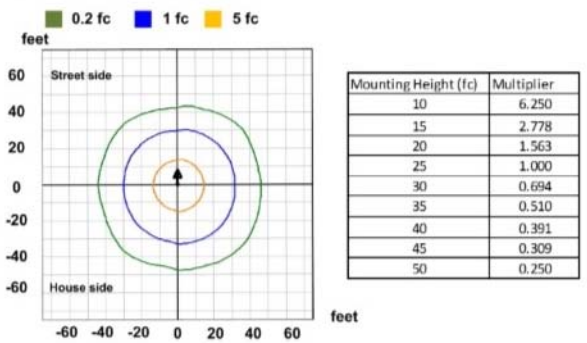

Type 5W 150 Degrees

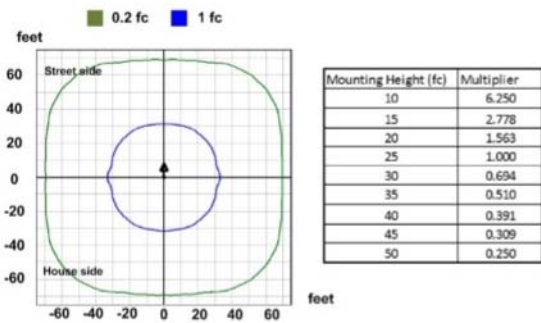

Order Information

Model#	Color Temp	Distribution Type*	Finish	Options	Voltage
DL-SR-wattage (20 – 360w)	2,700-6000k	3M 5N 5R 5W	WHiTe BRoNze BLack SILver	N - None D – Dimming S—Smart	V1 120-277V V2 347-480V

Example: DL-S-120w- 5000-5R-WHT-N-V1